

DECLARATION OF PERFORMANCE

Nr. 113/CPR/140701

1. Unique identification code of the product-type: **SEAL-ALL® XT8**

2. Type, batch or serial number or any other element allowing identification of the construction product as required pursuant to Article 11(4):
The batch number is printed on the packaging

3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer:
Sealants for facade – Conform EN 15651-1:2012 Type F-EXT-INT-CC (CLASS 20HM)
Sealants for sanitary joints – Conform EN 15651-3:2012 Type S (CLASS XS3)

4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required pursuant to Article 11(5):
POLYTECHNISCH BEDRIJF BVBA/SPRL – P.T.B.-COMPAKTUNA®
INDUSTRIEPARK ZWIJNAARDE 6
9052 GENT - BELGIUM

5. Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in Article 12(2): **Not relevant**

6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V: **System 3**

7. In case of the declaration of performance concerning a construction product covered by a harmonized standard:

The notified body **SKZ – TeConA GmbH No. 1213** performed the determination of the product type in accordance with EN 15651-1 / EN 15651-3 and the determination of the class as regards the reaction to fire under system 3 and issued: a test report

8. In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued: **Not relevant**

9. Declared performance

Essential characteristics	Performance	Harmonized technical specification
Reaction to fire	Class E	EN 15651-1:2012
Release of chemicals dangerous to the environment and health	NPD	
Water and air tightness		
Resistance to flow	≤ 3 mm	
Loss of volume	≤ 10 %	
Tensile properties for “non structural” low modulus sealants used in joints in “cold climate” areas (- 30°C)	NR	
Tensile properties for “non structural” sealants used in joints in “cold climate” areas (- 30°C) at maintained extension	NF	
Tensile properties at maintained extension after water immersion	NF	
Durability	Pass	

DECLARATION OF PERFORMANCE
Nr. 113/CPR/140701

Conditioning: method B (in accordance with ISO 8340)
Substrate:
Concrete M1 (with primer P05)
Glass (without primer)
Anodized Aluminium (without primer)

Essential characteristics	Performance	Harmonized technical specification
Reaction to fire	Class E	EN 15651-3:2012
Release of chemicals dangerous to the environment and health	NPD	
Water and air tightness		
Resistance to flow	≤ 3 mm	
Loss of volume	≤ 20 %	
Tensile properties at initial tension after water immersion	NF	
Microbiological growth	3	
Durability	Pass	
Conditioning: method B Substrate: Glass (without primer) Anodized Aluminium (without primer)		

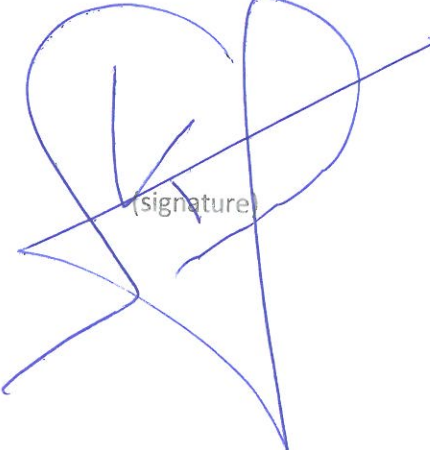
10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

K. SMESSAERT, Managing Director
(name and function)

GENT, 01/07/2014
(place and date of issue)


(signature)