


DIMENSIONS

Unit: mm

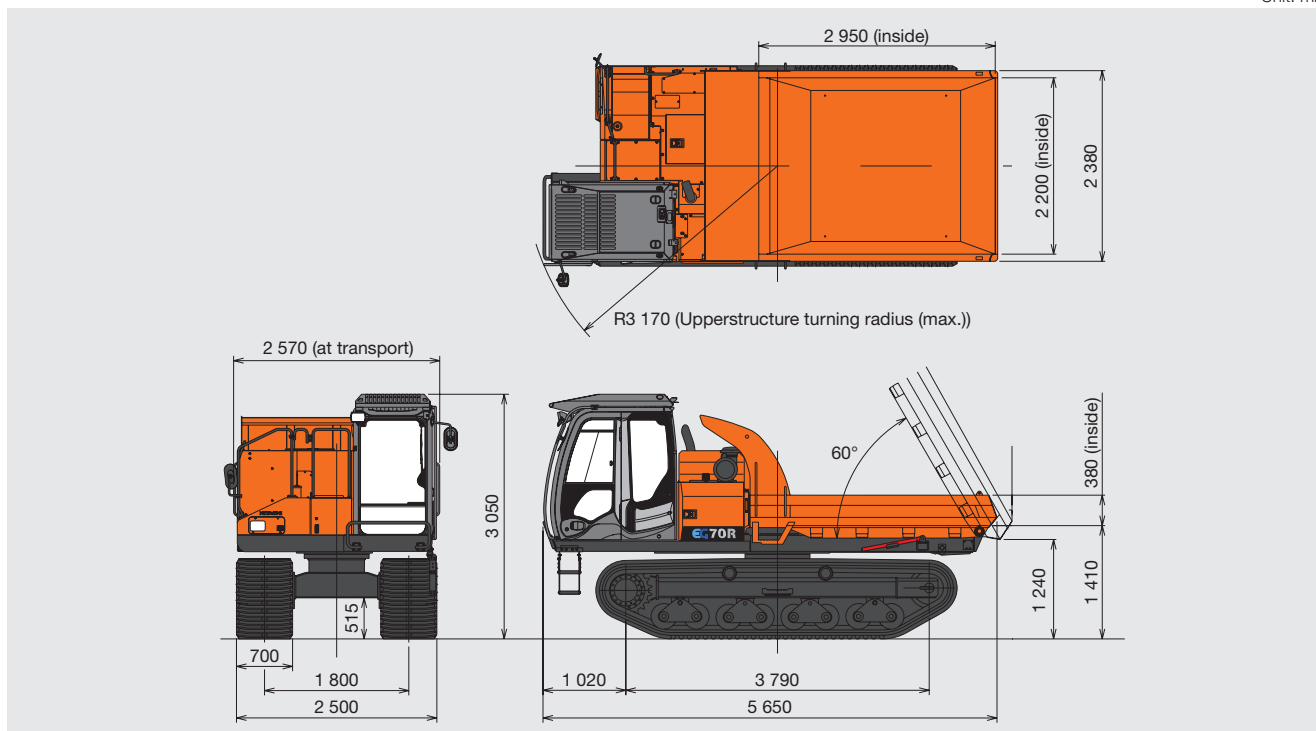


SPECIFICATIONS

		EG70R
		Scoop-end body
Operating weight		11 500 kg
Maximum payload		6 500 kg
Dump body capacity		2.20 m ³ / 3.76 m ³
Engine	Make and model	Isuzu AH-4HK1X
	Type	Water-cooled, 4-cycle, direct injection
	Rated power	140 kW / 2 100 min ⁻¹ (190 PS / 2 100 rpm)
	Displacement	5.193 L (5 193 cc)
Ground pressure	Unloaded	21 kPa (0.22 kgf/cm ²)
	Loaded	33 kPa (0.34 kgf/cm ²)
Drive system		Fully hydraulic (2-pump 2-motor *HST)
Shoe type		Steel-cored rubber shoes
Shoe width		700 mm
Swing speed		4 min ⁻¹ (4 rpm)
Travel speeds	Low	0 - 6.0 km/h
	High	0 - 8.5 km/h
Fuel tank capacity		165 L

Data is expressed in SI units, followed by reference data in conventional units. *HST : Hydro Static Transmission

OPTIONS

- Rear gate body
- Strengthened bottom plate



Rear gate body

These specifications are subject to change without notice.

Illustrations and photos show the standard models, and may or may not include optional equipment, accessories, and all standard equipment with some differences in color and features. Before use, read and understand the Operator's Manual for proper operation.