


Overview of our technical specifications :

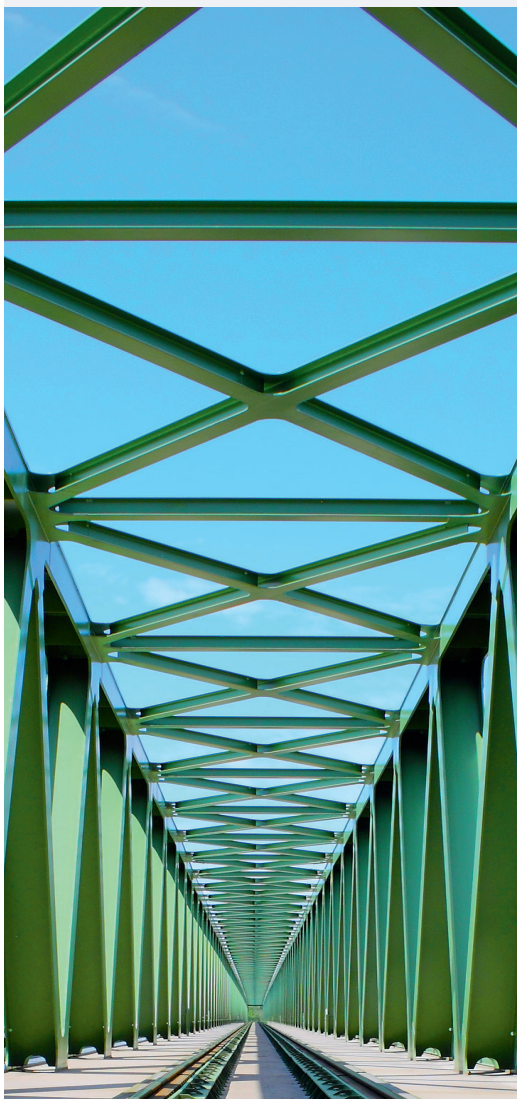

	Polysilco HS Universal	Polyfix	Polyzinc	Polymicace	Polyguard	Polygloss
Gloss Gardner 60°	Mat	Satin/Gloss	Mat	Mat	Mat	High Gloss
Density (at 20°C)	1,32 ± 0,05 g/ml	1,15 ± 0,05 g/ml	3,17 ± 0,05 g/ml	1,52 ± 0,05 g/ml	1,55 ± 0,05 g/ml	1-1,4 g/ml
Solids content • In volume • In weight	66 ± 2% 77 ± 2%	64 ± 2% 69 ± 2%	61 ± 2% 89 ± 2%	66 ± 2% 79 ± 2%	66 ± 2% 82 ± 2%	52-65% 58-65%
VOC • Undiluted	300 g/L	315g/L	342 g/L	< 300 g/L	< 295 g/L	370 - 430g/L
Drying times (at 20°C) • Dustfree • Tackfree • Dry	1 h 4 h 6 h	4 h 8 h 12-16 h	15 mins 30 mins 4 h	1 h 2,5 h 6 h	1 h 2,5 h 6 h	2 h 5 h 10 h
Recoat times at 20°C	6 h	12-24 h	4 h	6 h	6 h	12 h
Recommende thickness (in micron)	60-80 120*	20-30	40-60	60-100 160*	60-100 160*	40
Theoretical yield (dry)	16,5 m ² /L (40 micron)	16 m ² /L (40 micron)	15,4 m ² /L (40 micron)	7,5 m ² /L (80 micron)	7,5 m ² /L (80 micron)	10,5-14 m ² /L

**Providing that Additive MCU HB is added*

For more detailed overview, please do not hesitate to ask our technical data sheets or test reports

PROTECTION MADE EASY

