

REV. N. 00 - 02.2020 - MIC STUDIO



**SCM GROUP SPA**  
via Casale 450 - 47826 Villa Verucchio, Rimini - Italy  
tel. +39 0541 674111 - fax +39 0541 674274  
scm@scmgroup.com  
www.scmwood.com



# All “Made in SCM Italy”

## *From casting iron to finished product.*

Come see our production plants and touch the quality of SCM machines; you will be our guest.



## Classical machines for the advanced joinery.

SCM's objective is to guarantee customers high quality technologies which meet their requirements in such a way as to make SCM the partner for any needs.

## nova range

Guaranteed quality at your fingertips.

circular saws	programmable	nova si 400ep page 4	nova si x page 16				
	manual	nova si 400 page 5	nova si 300 page 6	nova si 300s page 7	nova si 40 page 17	nova si 30 page 17	
planers	surface planers	nova f 520 page 26	nova f 410 page 26				
	thicknessing planers	nova s 630 page 27	nova s 520 page 27				
	surfacing- thicknessing planers	nova fs 520 page 28	nova fs 410 page 29				
spindle moulders	manual	nova tf 110 page 36	nova tf 100 page 36	nova ti 105 page 37			

The motors powers in this catalogue are expressed in S6, except where otherwise specified.  
In this catalogue, machines are shown in CE configuration and with options.

We reserve the right to modify technical specifications without prior notice, provided that such modifications do not affect safety as per CE norms.





programmable  
circular saw  
nova si 400ep




		nova si 400ep	nova si 400
Max. saw blade diameter <b>with installed scoring unit</b>	mm	400	400
Max. saw blade projection from the table at 90°/45°	mm	140/97	140/97
Saw blade rotating speed	rpm	3000/4000/5000	3000/4000/5000
Squaring stroke	mm	3200 ÷ 3800	3200 ÷ 3800
Cutting width on rip fence	mm	1000 ÷ 1500	1000 ÷ 1500
Three-phase motors power starting from	kW/Hz	7 (8) / 50 (60)	7 (8) / 50 (60)
Find the complete technical specification at page 14			



manual  
circular saw  
nova si 400



Saw Unit  
sturdy structure



Sliding Carriage  
high cutting quality



Rip Fence  
rapidity and accuracy

High construction quality for reliability and safe performance.




manual  
circular saw  
nova si 300




		nova si 300	nova si 300s
Max. saw blade diameter <b>with installed scoring unit</b>	mm	315	315 ÷ 400
Max. saw blade projection from the table at 90°/45°	mm	100/70	100/70 (with 315 mm blade) 140/97 (with 400 mm blade)
Saw blade rotating speed	rpm	4000	4000 (with 315 mm blade) 3700 (with 400 mm blade)
Squaring stroke	mm	3200 ÷ 3800	1600
Cutting width on rip fence	mm	1000 ÷ 1500	1000 ÷ 1500
Three-phase motors power starting from	kW/Hz	5 (6) / 50 (60)	5 (6) / 50 (60) (with 315 mm blade) 7 (8) / 50 (60) (with 400 mm blade)
Find the complete technical specification at page 14			




manual  
circular saw  
nova si 300s



Saw Unit  
sturdy structure



Sliding Carriage  
high cutting quality



Rip Fence  
rapidity and  
accuracy

Essential configuration with complete  
equipment to carry out professional machining.



# circular saws operating groups



## sturdy structure

### Saw Unit

The saw blade lifting is carried out by a strong cast-iron structure with sliding on ground round slideways which guarantee the **best accuracy**.

The unit tilting is carried out on cast-iron rotation sectors in a crescent shape to ensure reliability over time.

always user friendly and precise

### Handwheels on the machine front

Ease-of-use in every day operation due to the dedicated gear box (**SCM solution**), fully protected from dust, that provides a smooth and direct transmission.


Every minimum hand-wheel movement corresponds to a precise blade adjustment.



## perfect cut

### Saw unit

Maximum torsional rigidity and the total absence of vibration through the closed loop structure of the saw unit which ensures **perfect alignment of the blades** during tilted and difficult cuts.

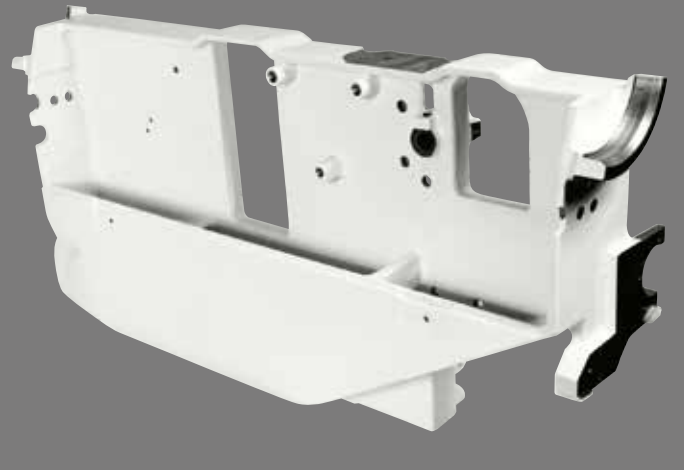

## simple and effective

### Scoring unit adjustment

Vertical and horizontal adjustments are carried out by user-friendly mechanical levers that operate directly making **precise and smooth movements**. The useful mechanical stops allow immediately finding of the set position. The positioning of the controls allows their use without moving from the front of the machine.



## smooth, rapid and precise positioning

### Rip fence

Sliding of the rip fence support on round bar with micrometric adjustment.

The support can be also equipped with digital readout for fence position with detecting system on magnetic band (option). The fence can be easily excluded from the working area when it isn't used.



maximum cut quality guaranteed over time

### Sliding carriage

The carriage will never require adjustment due to its closed reticular geometry with steel guides using an **exclusive method of mechanical fixing**.



## optimal support

### Squaring frame and fence

Panel loading is easy on the large squaring frame with an idle roller at the end and the mobile cross beams offer an **optimal support** also to smaller panels. The telescopic squaring fence with the inclined metric scale and two reversible stops can be used to square panels measuring 3200x3800 mm and for tilted cuts at up to 45° on both sides of the frame.



# nova si 400ep

## electronic controls



the practical advantage for automatic control of the main positions

### Ready

The **programming** of the work becomes **simple and effective** with the electronic control with a 4" LCD display.

- Working mode: manual, semi-automatic and automatic with a memory capacity of up to 99 programs
- Tool data setting with automatic height adjustment
- Calculator and hour counter

## circular saws

### main optional devices



**Overhead blade protection**  
For totally safe machining.

speed and accuracy

**Motorised programmable rip fence mounted on a recirculating ball screw mechanism with sliding on linear guides.**

*Only for Ready 3 UP Plus version*



Saw unit lifting



Saw unit tilting



Programmable rip fence (option)



Blade speed readout

### Rip fence unit

The exclusive referencing system for the first trim cut allows the setting of trim quantity to be cut for every side **without any test cuts.**



### Angular cutting devices

Available for the following versions

- traditional
- with automatic self-adjustment of the stops position in respect of the blade

practicality and safety

**Motorized programmable rip fence with steel cable and sliding on sturdy round steel bar.**

Position readout on magnetic band.

*Only for Ready 3 version*





# circular saws main optional devices




**Squaring frame with "Compex" device**  
with automatic self-adjustment of stops position in respect of the blade and rule tilting angle. Furthermore, thanks to the dedicated frame structure, it is possible to carry out **tilted cuts keeping the squaring rule comfortably within the operator's reach**, both in acute cuts and in obtuse ones, without renouncing to a valid support of the piece.



**maximum practicality**  
**Pushbuttons integrated in the sliding carriage**  
The possibility to start or stop the blades motors from the pushbuttons located at the ends of the carriage **considerably helps when machining large dimensioned panels**.



**Expandable scoring blade**  
Manually expandable with variable thickness from 2,8 to 3,6 mm. Blade diameter: 120 mm.

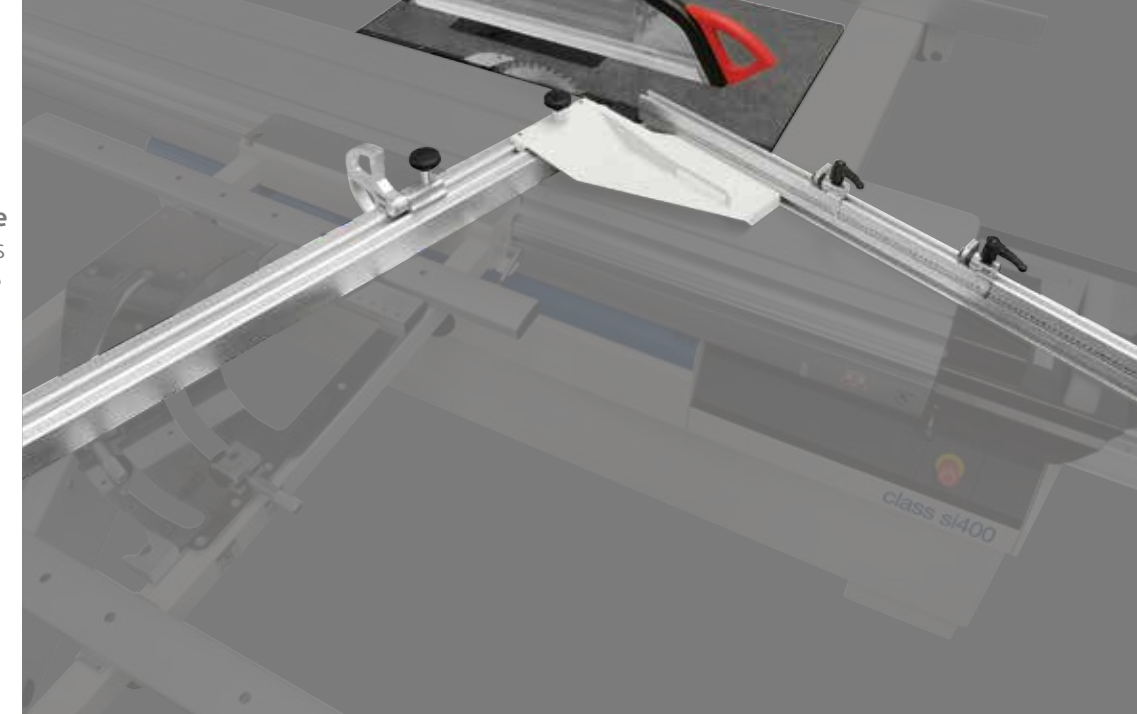

**Fence for complementary cutting**  
Device to be applied directly on the squaring rule that allows to quickly carry out cuts with angles complementary to the rule one.




**Mechanical preset for "DADO" machining**  
Possibility of using a tool (not included) to replace the main blade, with 203 mm maximum diameter and 20 mm maximum thickness.

**Electronic readouts on the squaring stops**  
The stops can be easily read even from distance.




**Advanced materials machining**  
PVC and other plastic materials. Nylon, polycarbonate and other synthetic materials. Corian and other composite materials. Aluminium, brass and other light metals.

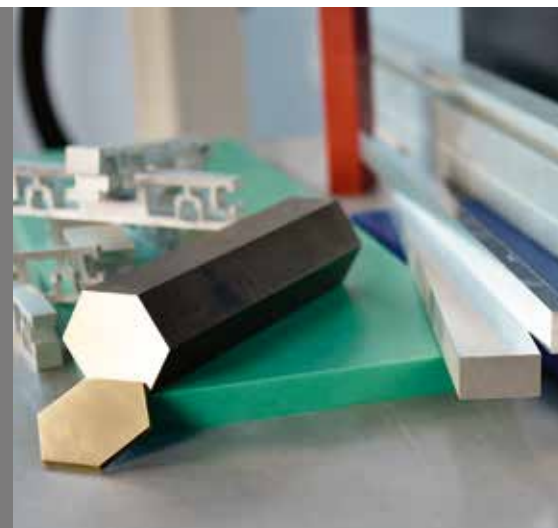

**Device for the blade micro-lubrication**  
Compulsory for the machining of light alloys, extremely useful with particular plastic materials.

circular  
saws  
technical  
data

S Standard  
O Option

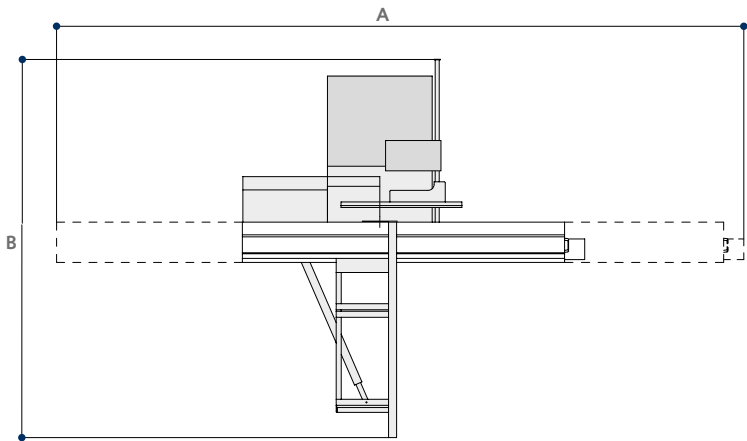

TECHNICAL DATA		nova si 400ep	nova si 400	nova si 300	nova si 300s
Cast-iron saw table dimensions	mm	1040 x 630	1040 x 630	900 x 550	900 x 550
Blades tilting		90° ÷ 45°	90° ÷ 45°	90° ÷ 45°	90° ÷ 45°
Max. saw blade diameter <b>with installed scoring unit</b>	mm	400	400	315	315 ÷ 400
Max. saw blade projection from the table at 90°/45°	mm	140/70	140/97	100/97	100/70 (with 315 mm blade) 140/97 (with 400 mm blade)
Saw blade rotating speed	rpm	3000/4000/5000	3700	4000	4000 (with 315 mm blade) 3700 (with 400 mm blade)
Squaring stroke	mm	3200 ÷ 3800	3200 ÷ 3800	3200 ÷ 3800	1600
Cutting width on rip fence	mm	1000 ÷ 1500	1000 ÷ 1500	1000 ÷ 1500	1000 ÷ 1500
<b>other technical features</b>					
Three-phase motors 5 kW (6,6 hp) 50 Hz - 6 kW (8 hp) 60 Hz		-	-	S	S
Three-phase motors 7 kW (9,5 hp) 50 Hz - 8 kW (11 hp) 60 Hz		S	S	O	O
Three-phase motors 9 kW (12 hp) 50 Hz - 11 kW (15 hp) 60 Hz		O	O	-	-
Three-phase motors 14 kW (19 hp) 50 Hz - 14 kW (19 hp) 60 Hz		-	-	-	-
Exhaus hoods diameter:					
- at the base	mm	120	120	120	120
- on overhead protection	mm	80	80	80	80
- on riving knife	mm	-	60	60	60

OVERALL DIMENSIONS		nova si 400ep	nova si 400	nova si 300	nova si 300s
A with 1600 mm carriage	mm	-	-	-	3760
A with 3200 mm carriage	mm	7100	7100	7100	-
A with 3800 mm carriage	mm	8140	8140	8140	-
B with 1000 mm cutting width on rip fence	mm	4870	4870	4870	3115
B with 1270 mm cutting width on rip fence	mm	5155	5155	5155	3400
B with 1500 mm cutting width on rip fence	mm	5370	5370	5370	3615

MAIN OPTIONAL DEVICES	nova si 400ep	nova si 400	nova si 300	nova si 300s
"Ready 3" version	O	-	-	-
"Ready 3 UP" version	O	-	-	-
"Ready 3 UP Plus" version	O	-	-	-
"CUT 140" version	-	-	-	O
Expandable scoring blade	O	O	O	O
Pushbuttons integrated in the sliding carriage	O	O	O	-
Squaring fence with LCD readouts for stops position	O	O	O	-
Fence for angular cutting on the sliding carriage	O	O	O	O
Fence for angular cutting with self-adjustment	O	O	O	O
Squaring frame with "Compex" device	O	O	O	-
Fence for complementary cutting	O	O	O	-
Fence for rip cutting on the sliding carriage	O	O	O	O
Electronic readout of parallel fence position	O	O	O	O
"DADO" machining	O	O	O	O
Machine configuration for advanced materials machining	O	O	O	O
Device for the blade micro-lubrication for the machining of plastic materials and light alloy	O	O	O	O
Overhead blades protection	S	S*	O	O

\* Standard for CE and USA-Canada versions; Option for NO CE version



programmable  
circular saw  
nova si x




±46° double tilting blade.

manual  
circular saws  
nova si 40  
nova si 30



		nova si x	nova si 40	nova si 30
Max. saw blade diameter <b>with installed scoring unit</b>	mm	400	400	315
Max. saw blade projection from the table at 90°/+45°/-45°	mm	136/97/60	136/97/-	90/70/-
Saw blade rotating speed	rpm	4000	4000	4000
Squaring stroke	mm	2600 ÷ 3200	2600 ÷ 3200	2600 ÷ 3200
Cutting width on rip fence	mm	1270	1270	1270
Three-phase motors power starting from	kW/Hz	7	5	5


Find the complete technical specification at page 24



Saw Unit  
sturdy structure



Sliding Carriage  
unrivalled cutting  
finishing



Rip Fence  
rapidity and  
accuracy

Professional circular saws for  
uncompromising quality.


# circular saws operating groups



double tilting at  
everybody's reach

The  $\pm 46^\circ$  tilting of the  
unit is done by 2 wide  
semi-circular fences.


For *nova si x* the lifting  
of the blade unit is done  
by 2 ground cylindric bars.

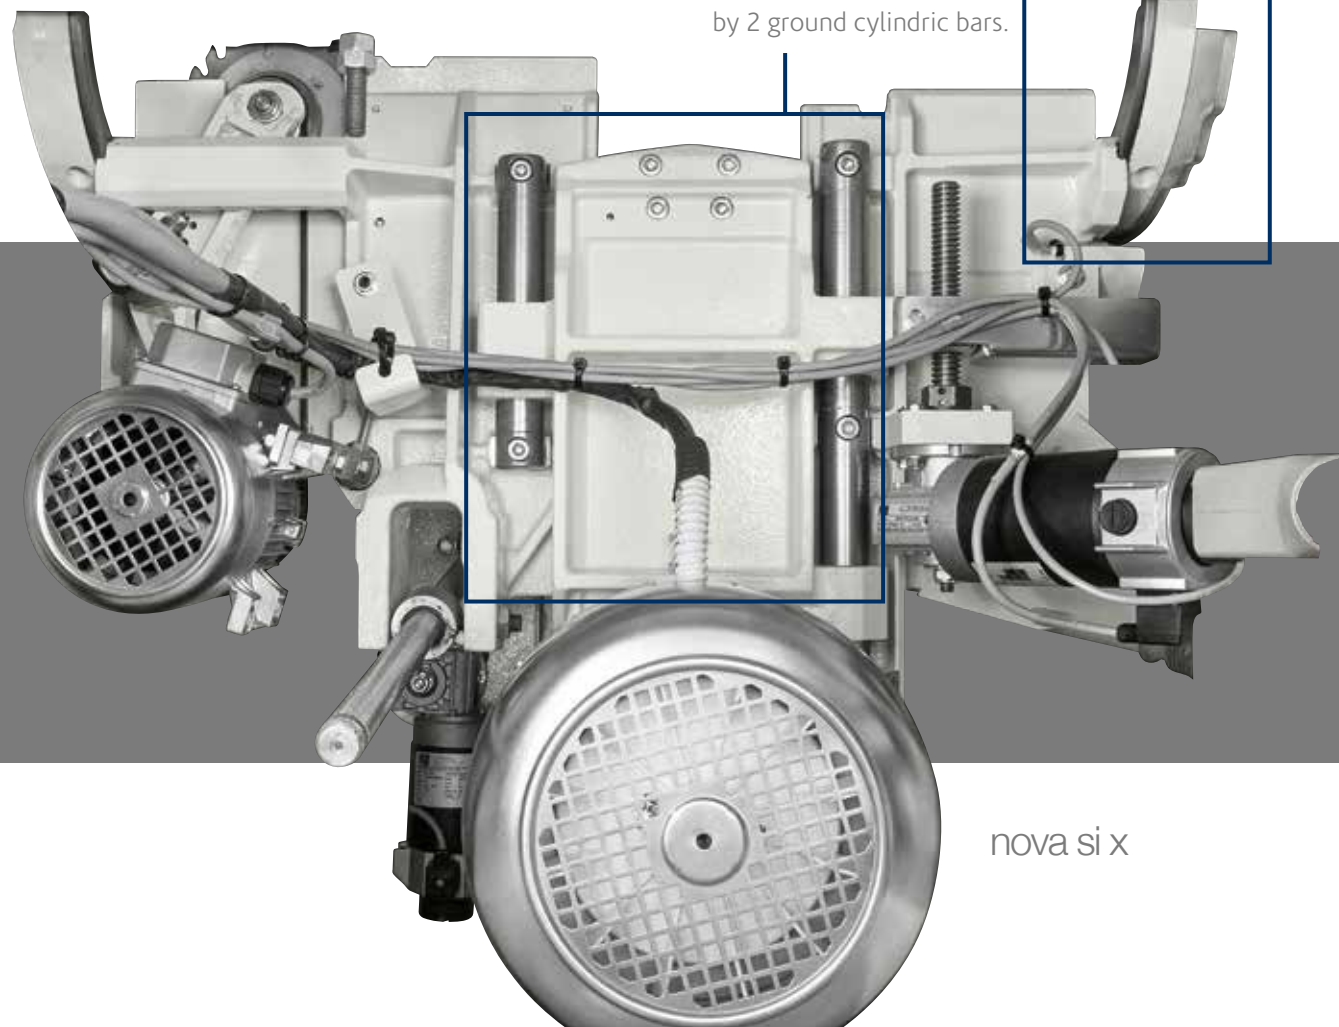

nova si x

The rotation fulcrums of the saw unit  
have a 120 mm diameter and stand  
on steady crescent shaped rests that  
separate it from the base: a rigid  
reliable solution.

For *nova si 40* and *nova si 30*,  
the lifting of the blade unit is  
done by a robust cast iron  
structure with dovetail system.

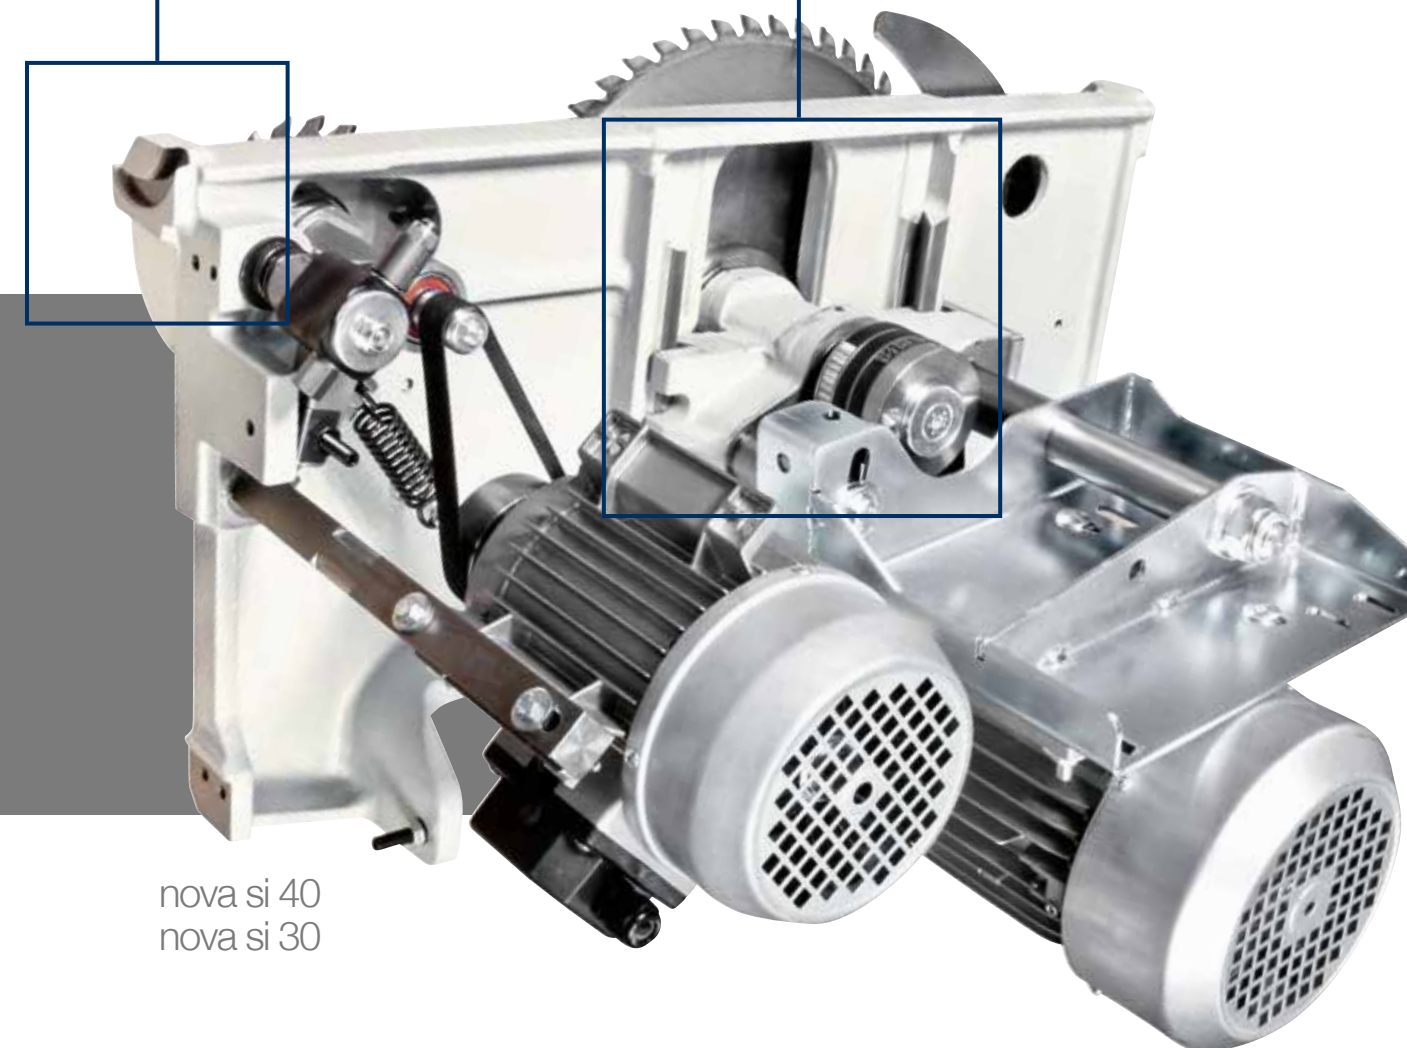

nova si 40  
nova si 30

## sturdy structure

### Saw Unit

Saw units with a stiff cast-iron structure which can  
accommodate a blade of 400 mm diameter  
(315 mm for *nova si 30*) **with scoring blade  
installed.** They ensure a perfect and easy cutting  
of veneer panels and solid wood material with very  
high thickness. The saw blade uses 100% of the  
motor power, thanks to the scoring blade with an  
independent motor as standard.



The scoring blade is adjustable from the  
outside without tools and allows fast and  
accurate positioning with no play.



# circular saws operating groups



unrivalled cutting finishing  
**Sliding Carriage**  
Optimal support also to larger pieces, with the **new sliding table, 360 mm wide**.



Exceptional accuracy and smoothness to secure the guides it is not used glue, since the thickness could affect sliding. They are secured with a **procedure of aluminum riveting**.

# circular saws optional electronic controls

simple and quick  
**Programmed movement**  
The "Ready" control manages the powered and programmed movement of the saw blade unit increasing productivity and working quality.  
*(standard for nova si x)*



**Two positions overhead blade protection**, for totally safe machining.  
*(nova si x)*



immediate control  
**Squaring frame and fence**  
Panel loading is easy on the large squaring frame with an idle roller at the end.  
**The telescopic squaring fence with the inclined metric scale and two reversible stops** can be used to square panels measuring 3200x3200 mm and for tilted cuts at up to 45° on both sides of the frame.



smooth, rapid and precise positioning  
**Rip fence**  
Sliding of the rip fence support on round bar with micrometric adjustment.  
The support can be also equipped with digital readout for fence position with detecting system on magnetic band (option). The fence can be easily excluded from the working area when it isn't used.



**Ready 3 / Ready 3 UP**  
**Automatic positioning of the parallel fence**, from "Ready" control (3 axes). Programmed or manual fence movement with a hold-down drive for the maximum versatility.  
**In addition, the Ready 3 UP version has the control on the mobile control panel.**

**Powered handling of the operating groups with digital readouts**  
For the best accuracy and easy to use.



maximum practicality  
**Pushbuttons integrated in the sliding carriage**  
The possibility to start or stop the blades motors from the pushbuttons located at the ends of the carriage **considerably helps when machining large dimensioned panels**.





# circular saws main optional devices


**Squaring frame with "Compex" device**  
with automatic self-adjustment of stops position  
in respect of the blade and rule tilting angle.  
Furthermore, thanks to the dedicated frame structure,  
it is possible to carry out **tilted cuts keeping the  
squaring rule comfortably within the operator's  
reach**, both in acute cuts and in obtuse ones, without  
renouncing to a valid support of the piece.



**Digital readout for the  
fence position on the  
parallel fence**  
It allows precise positioning  
with the magnetic strip  
sensor.



**Mechanical preset for  
"DADO" machining**  
Possibility of using a tool  
(not included) to replace  
the main blade.

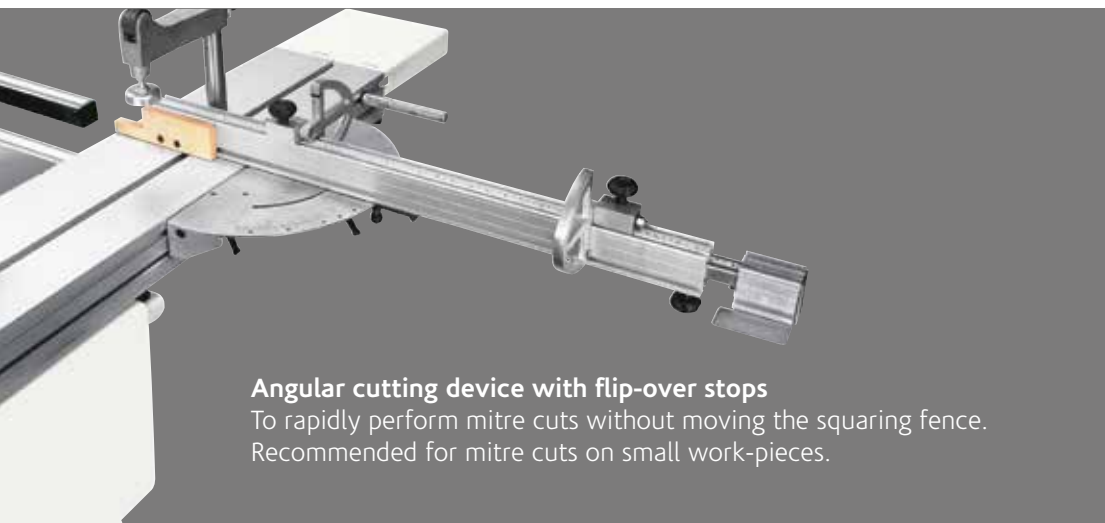

**Angular cutting device with flip-over stops**  
To rapidly perform mitre cuts without moving the squaring fence.  
Recommended for mitre cuts on small work-pieces.



**Electronic readouts on  
the squaring stops**  
The stops can be easily read  
even from distance.



**Expandable scoring blade**  
Manually expandable with variable thickness:  
- from 3,5 to 4,5 mm (blade diameter: 160 mm)  
*nova si x*  
- from 2,8 to 3,6 mm (blade diameter: 120 mm)  
*nova si 40* and *nova si 30*




**N.2 sawblades speeds**  
The two sawblade rotating speeds  
(3500/5000 rpm) are controlled by inverter.

**Pre-set angular cutting  
device directly positioned  
on squaring frame**  
To find rapidly the most  
common angles with the  
squaring fence. Useful for  
large work-pieces.



**Additional table on the sliding carriage**  
For the support of large dimensioned panels.

**Advanced materials machining**  
PVC and other plastic materials.  
Nylon, polycarbonate and other synthetic  
materials. Corian and other composite  
materials. Aluminium, brass and  
other light metals.

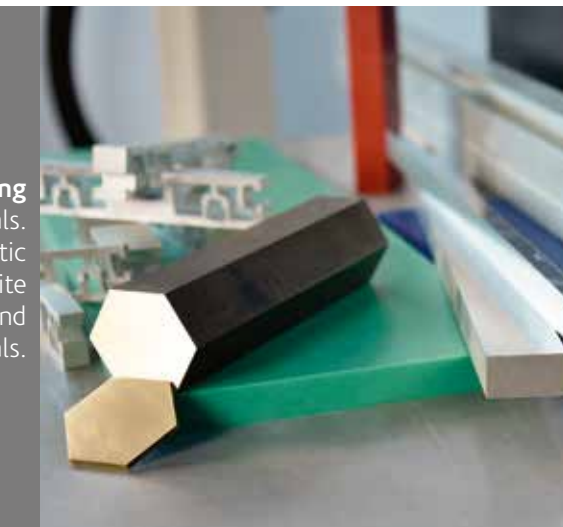


**Device for the blade micro-lubrication**  
Compulsory for the machining of light  
alloys, extremely useful with particular  
plastic materials.



circular  
saws  
technical  
data

S Standard  
O Option

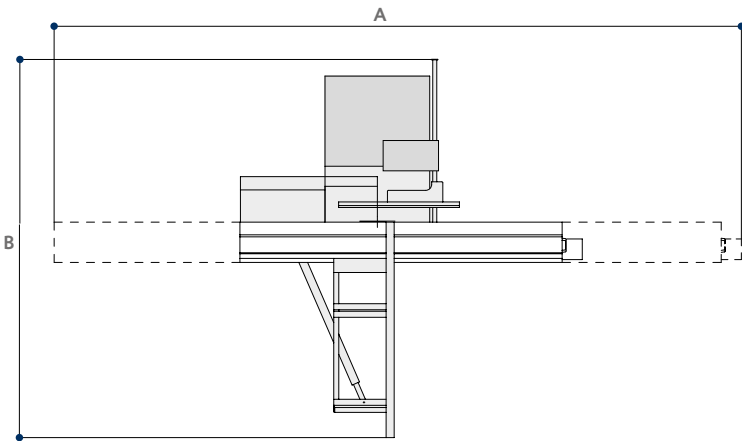

TECHNICAL DATA		nova si x	nova si 40	nova si 30
Cast-iron saw table dimensions	mm	1000 x 685	940 x 560	940 x 560
Blades tilting		-46° ÷ +46°	90° ÷ 45°	90° ÷ 45°
Max. saw blade diameter <b>with installed scoring unit</b>	mm	400	400	315
Max. saw blade projection from the table at 90°/+45°/-45°	mm	136/97/60	136/97/-	90/70/-
Saw blade rotating speed	rpm	4000	4000	4000
Squaring stroke	mm	2600 ÷ 3200	2600 ÷ 3200	2600 ÷ 3200
Cutting width on rip fence	mm	1270	1270	1270
<b>other technical features</b>				
Three-phase motors 5 kW (6,6 hp) 50 Hz - 6 kW (8 hp) 60 Hz		-	S	S
Three-phase motors 7 kW (9,5 hp) 50 Hz - 8 kW (11 hp) 60 Hz		S	O	O
Exhaus hoods diameter:				
- at the base	mm	120	120	120
- on overhead protection	mm	80	80	80
- on riving knife	mm	-	60	60

OVERALL DIMENSIONS		nova si x	nova si 40	nova si 30
A with 2600 mm carriage	mm	5860	5860	5860
A with 3200 mm carriage	mm	7060	7060	7060
B with manual rip fence	mm	3650	3650	3650
B with automatic rip fence	mm	4820	4820	4820

MAIN OPTIONAL DEVICES	nova si x	nova si 40	nova si 30
"Ready 3" version / Programmed parallel fence	O	O	-
"Ready 3 UP" version	O	O	-
Powered handling of the operating groups with digital readouts	-	O	O
Pushbuttons integrated in the sliding carriage	O	O	O
N.2 sawblades speeds (3500/5000 rpm)	O	O	-
Electronic readouts on the squaring stops	O	O	O
Angular cutting device with flip-over stops	O	O	O
Pre-set angular cutting device directly positioned on squaring frame	O	O	O
Squaring frame with "Compex" device	O	O	O
Additional table on the sliding carriage	O	O	O
Digital readout for the fence position on the parallel fence	O	O	O
"DADO" machining	O	O	O**
Overhead blades protection	S	O*	O

\* Standard for CE and USA-Canada versions; Option for NO CE version

\*\* Not available for CE version

surface planers  
nova f 520  
nova f 410



thicknessing planers  
nova s 630  
nova s 520



		nova f 520	nova f 410	nova s 630	nova s 520
Working width	mm	520	410	630	520
Cutterblock diameter/standard knives	mm/n.	120/4	120/4	120/4	120/4
Total worktable length	mm	2750	2610	-	-
Max. stock removal	mm	8	8	8	8
Min. ÷ max. working height on thicknesser		-	-	3,5 ÷ 300	3,5 ÷ 300
Three-phase motors power starting from	kW/Hz	5 (6) / 50 (60)	5 (6) / 50 (60)	7 (8) / 50 (60)	7 (8) / 50 (60)
Find the complete technical specification at page 34					



Surface Fence  
high rigidity



Interchangeable  
Rollers  
for every  
requirement



SCM Cutterblock  
simple and rapid


Perfect surfaces, practical  
and safe, ergonomics.



surfacing-thicknessing  
planers  
nova fs 520  
nova fs 410




		nova fs 520	nova fs 410
Working width	mm	520	410
Cutterblock diameter/standard knives	mm/n.	120/4	95/4
Total worktable length	mm	2250	2200
Min. ÷ max. working height on thicknesser	mm	3,5 ÷ 240	3,5 ÷ 240
Three-phase motors power starting from	kW/Hz	7 (8) / 50 (60)	5 (6) / 50 (60)
Find the complete technical specification at page 34			



Feeding on  
Connecting Rods  
constant precision



Thicknessing Table  
rigidity and  
accuracy



Surface Fence  
high rigidity

Easy and rapid to use with great performance  
in a limited space.

# planers operating groups

## high rigidity Surface fence


High rigid fence with a smooth movement thanks to the **central locking on round bar**. The graduated scale facilitates the operator in positioning the guide to the required tilting.



a guarantee of  
perfect planarity

## Simultaneous raising of the worktables


The system allows the **changeover from planer to thicknesser** with a single movement ensuring working rapidity and accuracy.

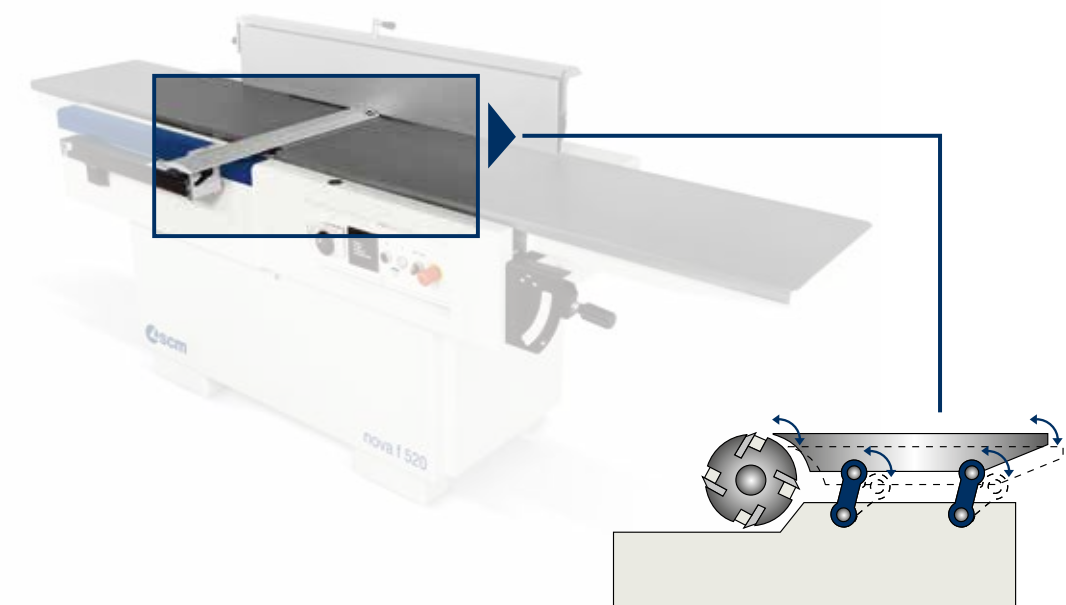

## constant precision over time

### Feeding on connecting rods

Very accurate machining with the movement of the infeed table by means of a parallelogram **kinetic mechanism which always gives the same distance between the cutterblock and the table**. The system operating directly on the connecting rods avoids any exertion to the table assuring constant planarity over time.

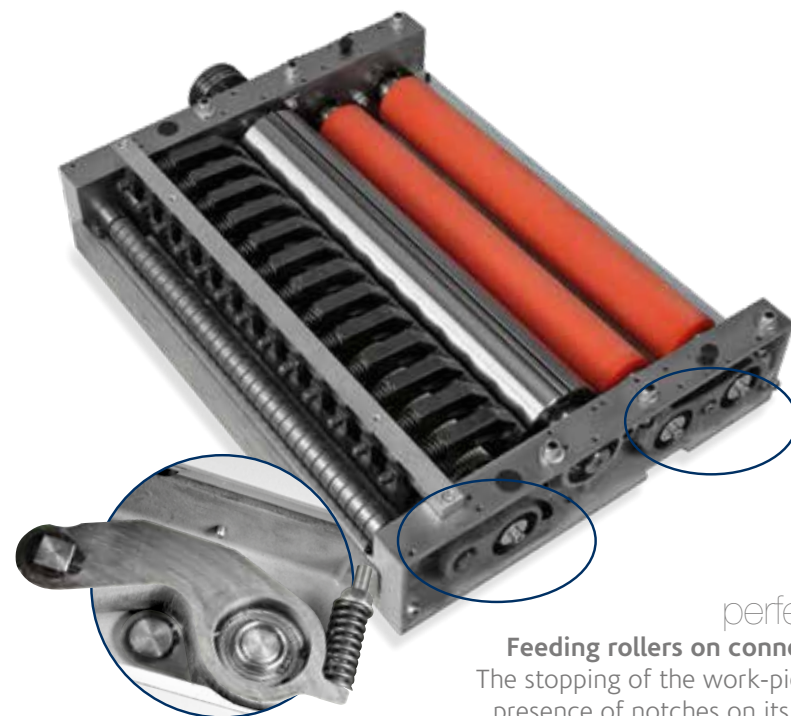

## perfect finish

### Feeding rollers on connecting rods


The stopping of the work-piece and the presence of notches on its surface are eliminated due to the movement system on all three rollers, that allows their vertical displacement by rotation and **the best linear feeding**. Perfect surfaces and high feeding performance with the standard rubber rollers.



## simple and rapid

### SCM cutterblock

The cutterblock is made from a single block of steel ensuring complete stability even under heavy dynamic loads.

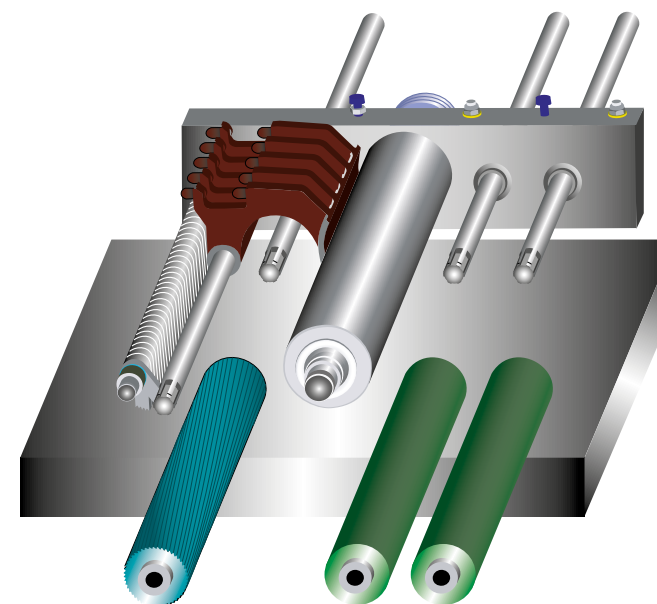

## solutions for every requirement

### Interchangeable rollers

**Perfect finish obtained by quick and easy changeover of the rollers** that allows the operator to configure the machine drive function in case of special requirements, such as a minimum removal of fine wood and/or batches where multiple pieces of different thicknesses are processed. *(third powered roller available as option)*

Powered worktable lifting with micrometric adjustment.

The 4 screws with a large diameter combined with the 2 side linear guides ensure worktable stability. The integrated protections guarantee high precision and reliability over time.





# planers

## main optional devices



**"Tersa" monoblock cutterblock**  
The cutterblock is made from a single block of steel ensuring complete stability even under heavy dynamic loads. Automatic knives clamping by means of the centrifugal force ensures safe and precise machining. The system, without fixing screws, makes knives substitution extremely fast.



**"Xylent" spiralknife cutterblock**  
The 3 spiralknives give an exceptional finish.  
**Reduced noise** during machining provides a more comfortable working environment. It also improves the dust extraction due to the **production of very small chips**. Each cutter has 4 tips which can be rotated into the cutting position when worn. Therefore, increasing the production life of the cutter block **before knives** require replacement.



**Maintenance case for "Xylent" spiralknife cutterblock**  
It includes:  
- 1 cleaning/degreasing liquid bottle for the resins cleaning  
- 1 set dynamometric key  
- 2 bit Torx  
- 10 inserts  
- 5 screws  
- 1 brass bristle brush to clean the spindle with mounted in inserts  
- 1 steel bristle brush to clean the inserts housings

**Cast-iron mortiser**  
Drilling holes and mortises are easily carried out. It includes the exhaust hood, 120 mm diameter and 16 mm chuck.



**Thickening table with idle rollers**  
It enables the feeding of moist and/or resinous wood. Particularly suitable for heavy duty woodworking operations and with rough work-pieces.



**Additional overturning fence**  
Integrated in the surface fence, it ensures perfect operator safety when machining small dimensioned work-pieces.

**Sectioned steel roller**  
It allows the simultaneous processing of different thicknesses giving great results even with minimum removal.




**Outfeed rollers in sandblasted steel**  
For a perfect post-processing finish.



# planers

## technical data

S Standard  
O Option

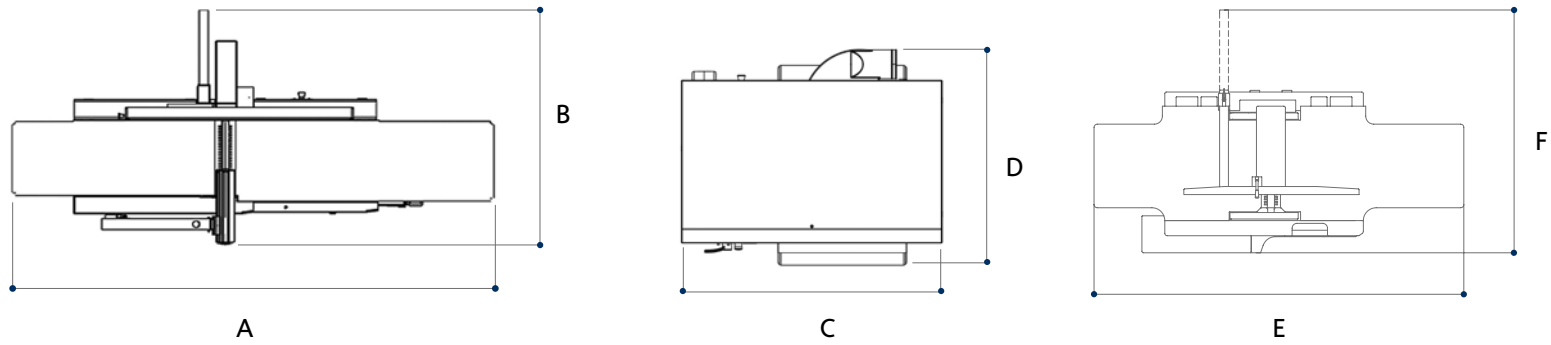

TECHNICAL DATA		nova f 520	nova f 410	nova s 630	nova s 520	nova fs 520	nova fs 410
Working width	mm	520	410	630	520	520	410
Cutterblock diameter/standard knives	mm/n.	120/4	120/4	120/4	120/4	120/4	95/4
Standard knives dimensions	mm	35 x 3 x 520	35 x 3 x 410	35 x 3 x 640	35 x 3 x 520	30 x 3 x 520	30 x 3 x 410
Max. stock removal	mm	8	8	8	8	5	5
Total worktable length	mm	2750	2610	-	-	2250	2200
Thicknessing table dimensions	mm	-	-	640 x 1000	530 x 900	520 x 850	410 x 775
Feed speed on thicknesser	m/min	-	-	5/8/12/18	5/8/12/18	5/8/12/18	6/12
Min. ÷ max. working height on thicknesser	mm	-	-	3,5 ÷ 300	3,5 ÷ 300	3,5 ÷ 240	3,5 ÷ 240
other technical features							
Three-phase motors 5 kW (6,6 hp) 50 Hz - 6 kW (8 hp) 60 Hz		S	S	-	S	-	S
Three-phase motors 7 kW (9,5 hp) 50 Hz - 8 kW (11 hp) 60 Hz		O	O	S	O	S	O
Three-phase motor 9 kW (12 hp) 50 Hz - 11 kW (15 hp) 60 Hz		-	-	O	-	O	-
Exhaust hood diameter	mm	120	120	150	150	120	120

OVERALL DIMENSIONS		nova f 520	nova f 410	nova s 630	nova s 520	nova fs 520	nova fs 410
A	mm	2750	2610	-	-	-	-
B	mm	1415	1150	-	-	-	-
C	mm	-	-	1275	1140	-	-
D	mm	-	-	1080	1003	-	-
E	mm	-	-	-	-	2250	2200
F	mm	-	-	-	-	1510	1200

MAIN OPTIONAL DEVICES	nova f 520	nova f 410	nova s 630	nova s 520	nova fs 520	nova fs 410
"Tersa" monoblock cutterblock	O	O	O	O	O	O
"Xylent" spiralknife cutterblock with 3 spiralknives	O	O	O	O	O	O
Maintenance case for "Xylent" spiralknife cutterblock	O	O	O	O	O	O
Additional overturning fence for the processing of thin work-pieces	O	O	-	-	O	O
Worktable with n.2 idle rollers	-	-	O	O	O	-
First front sectioned steel roller in place of the grooved one	-	-	O	O	-	-
Outfeed steel rollers in place of the rubber-coated ones	-	-	O	O	-	-
Powered thicknessing table lifting with micrometric movement	-	-	S	S	O	O
Cast-iron mortiser	-	-	-	-	O	O



spindle moulders  
nova tf 110  
nova ti 105  
nova tf 100



		nova tf 110	nova ti 105	nova tf 100
Spindle height CE Ø 30-35 (40-50)	mm	140 (180)	125 (125)	125 (125)
Max. diameter of the profiling tool	mm	250	240	240
Max. tool diameter retractable under worktable at 90°	mm	320	240	240
Max. diameter of tenoning tool CE Ø 30-35 (40-50)	mm	300 (350)	275 (320)	240 (240)
Three-phase motors power starting from	kW/Hz	5 (6) / 50 (60)	5 (6) / 50 (60)	5 (6) / 50 (60)
Find the complete technical specification at page 42				



Spindle Moulder Unit  
sturdiness and  
versatility



Spindle Moulder Fence  
set-up rapidity



Machine Versions  
specialisation and  
professionalism

Precision and reliability in unbeatable time.

# spindle moulders operating groups

sturdiness and versatility

## Spindle moulder unit

Maximum stability and rigidity in all working conditions, thanks to **a large spindle moulder column made entirely of cast iron.**

The spindle is surrounded by a cast iron "cup" to protect the internal mechanical components from shavings and sawdust.


The 5 standard speed (4 speed for *nova ti 105* and *nova tf 100*) are ideal for any type of machining, from profiling to moulding and tenoning, with the possibility to fit large diameter tools.



easy to use

## Adjustable spindle moulder fence

A handle provides the setting-up of the infeed table, which effects the removal and it is verified by an index on a metric scale.

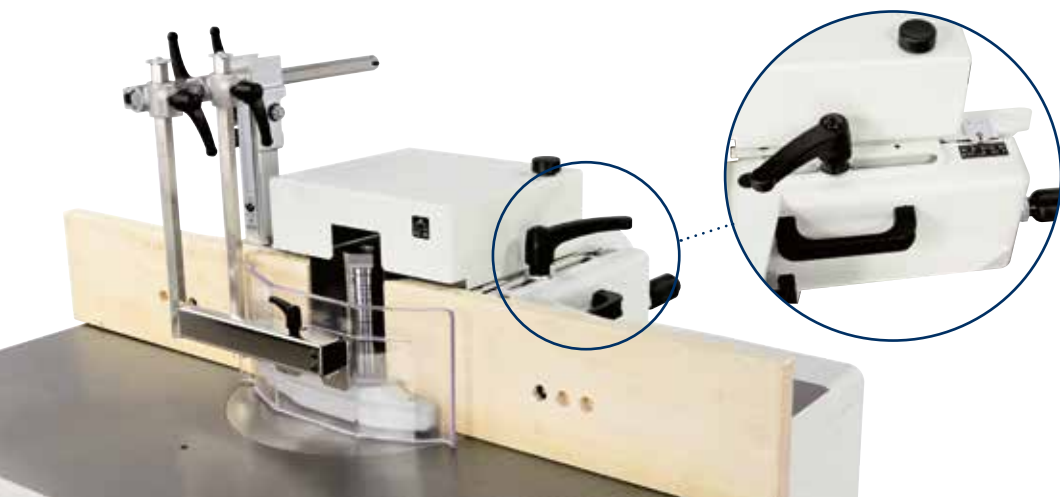

# nova ti 105 optional electronic controls



Powered operating unit movement with digital readouts  
Maximum precision and ease-of-use.

"Flex One" spindle moulder fence  
Automatic adjustment of the entire fence according to the tool diameter.

The "Flex" exclusion system (SCM solution) is user-friendly with precise re-positioning.



## Ready 3 UP

The programming of the work becomes simple and effective with the electronic **mobile control panel** with a 4" LCD colour screen. Working mode: manual, semi-automatic and automatic with a memory capacity of up to 99 programs.



Tool-holder shaft lifting



Tool-holder shaft tilting



Adjustment of the entire profiling fence



Tool-holder shaft speed readout




# spindle moulders machine versions

For the profiling of very large work-pieces, the *nova ti 105* can be equipped with a **support frame complete with two reversible stops**.



The *nova ti 105* "version with front sliding carriage" can be equipped with **tenoning table and tenoning hood** in order to house tools, 320 mm max. diameter (300 mm USA/ Canada).

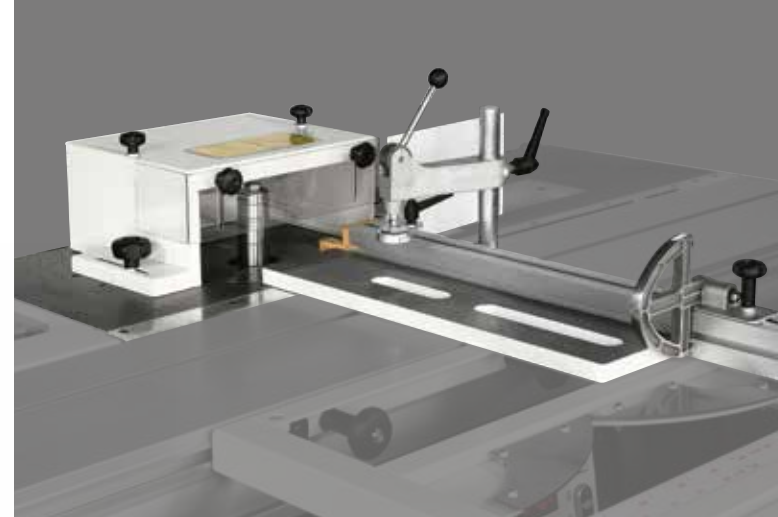



**Carriage on worktable for small tenoning operations**  
Ideal for tenoning of small work-pieces for the versions without sliding carriage. Mitre cuts with angles of  $\pm 60^\circ$  on the worktable are possible. Easy fitting and removal due to the fixing system on the worktable.



**"TL" versions**  
Top machining precision and stability due to the manual feed carriage with castiron structure mounted on axial bearings running on slideways made from hardened and ground bar.



For a total safety and a higher flexibility, the machine is supplied, as standard feature, with a **special protection hood for moulding operations**.

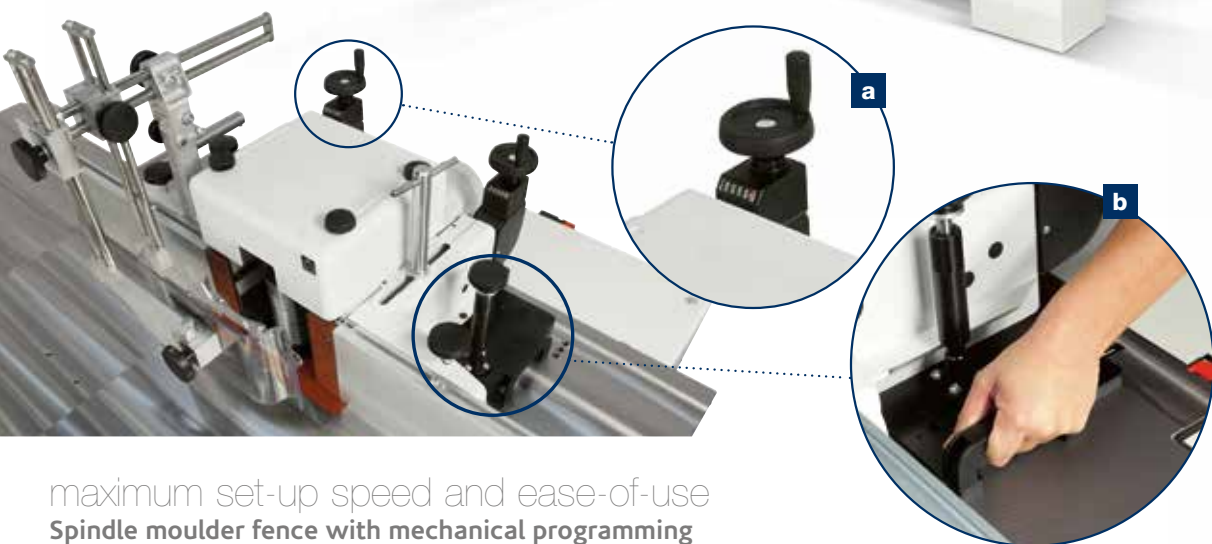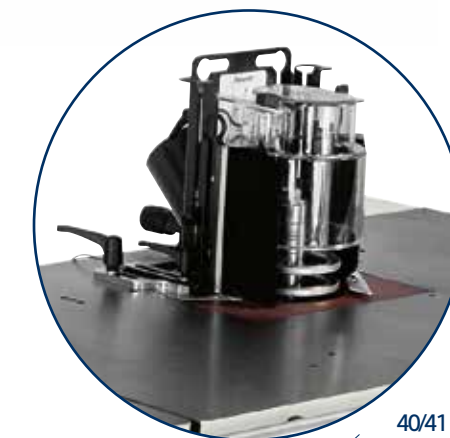

maximum set-up speed and ease-of-use

**Spindle moulder fence with mechanical programming**


No more test runs due to digital readouts **(a)** that ensure accuracy to a tenth of a millimetre in positioning the two worktables. The side handles **(b)** make it easy to remove and reposition the fence from the worktable.



**"LL" versions with worktable side extensions**  
Ideal when machining very long work-pieces due to worktable extensions. The mobile front bar makes it easy to move large dimensioned work-pieces on the worktable, particularly for edge profiling.

spindle moulders technical data

S Standard  
O Option

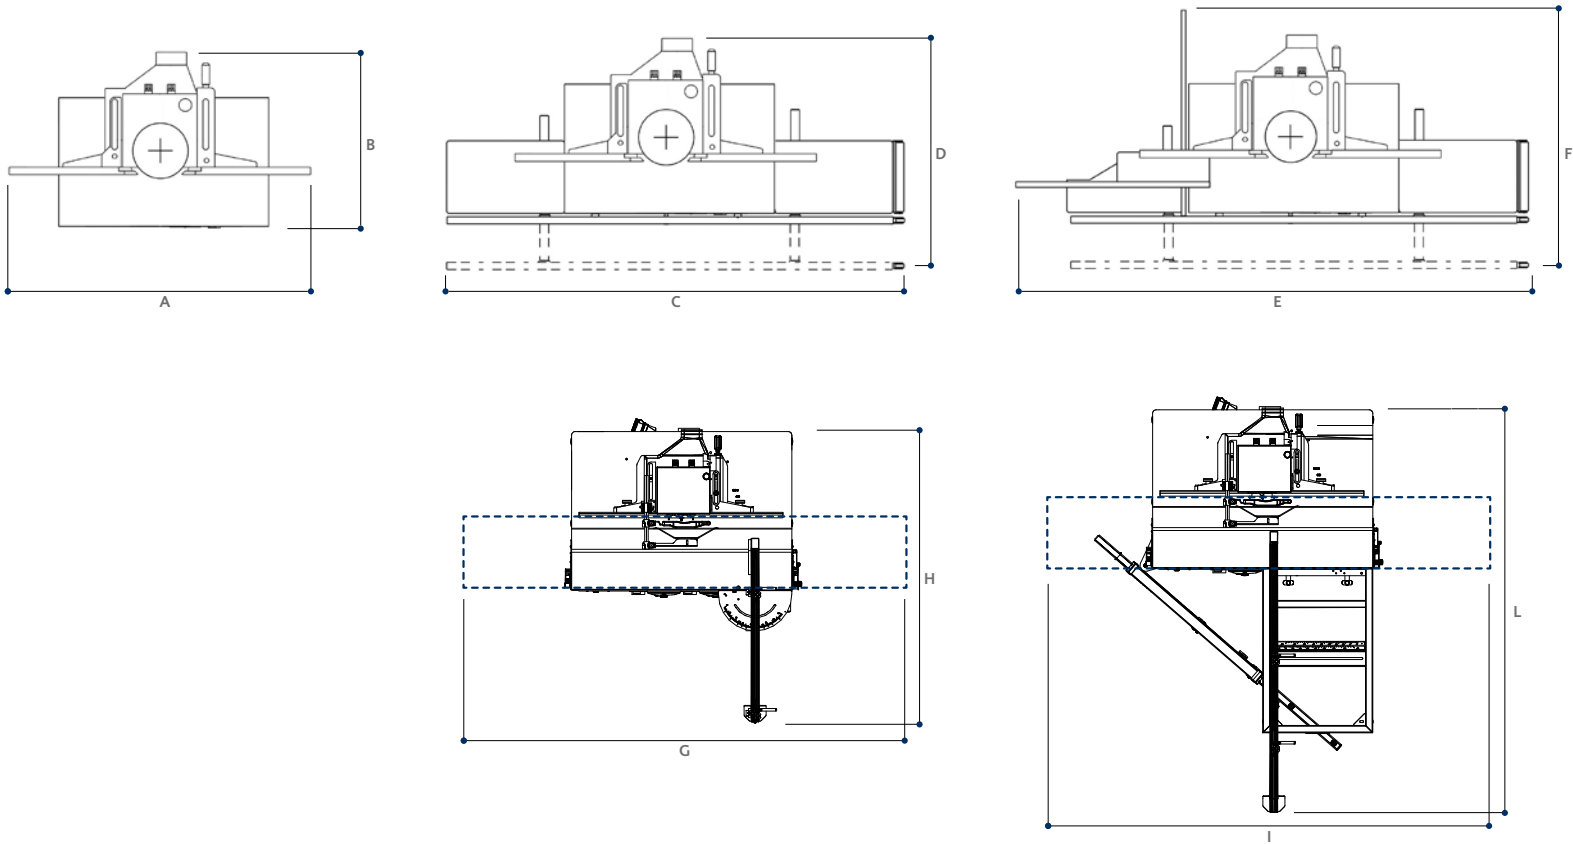

TECHNICAL DATA		nova tf 110	nova ti 105	nova tf 100
Worktable dimensions	mm	1200 x 730	1200 x 855	1080 x 655
Spindle tilting		-	0° ÷ +45°	-
Spindle height CE Ø 30-35 (40-50)	mm	140 (180)	125 (125)	125 (125)
Spindle speed (at 50 Hz)	rpm	3000/4500/6000/7000/10.000	3500/6000/8000/10.000	3500/6000/8000/10.000
Max. diameter of the profiling tool	mm	250	240	240
Max. tool diameter retractable under worktable at 90°	mm	320	240	240
Max. diameter of tenoning tool CE Ø 30-35 (40-50)	mm	300 (350)	275 (320)	240 (240)
other technical features				
Three-phase motors 5 kW (6,6 hp) 50 Hz - 6 kW (8 hp) 60 Hz		S	S	S
Three-phase motors 7 kW (9,5 hp) 50 Hz - 8 kW (11 hp) 60 Hz		O	O	O
Exhaust hood diameter:				
- at the base	mm	120	120	120
- on the spindle moulder fence	mm	120	120	120

OVERALL DIMENSIONS		nova tf 110	nova ti 105	nova tf 100
A	mm	1200	1200	1111
B	mm	730	855	655
C	mm	2600	2600	2600
D min.	mm	800	920	720
D max.	mm	1250	1220	1020
E	mm	3150	-	-
F min.	mm	800	-	-
F max.	mm	1250	-	-
G	mm	-	2800 ÷ 3850	-
H	mm	-	2354	-
I	mm	-	2800 ÷ 3850	-
L	mm	-	3200	-

MAIN OPTIONAL DEVICES		nova tf 110	nova ti 105	nova tf 100
"Ready 3 UP" version with "Flex One" spindle moulder fence		-	O	-
Support frame with tiltable telescopic fence complete with n.2 reversible stops		-	O	-
Powered operating unit movement with digital readouts		-	O	-
Spindle moulder fence with mechanical programming		O	O	O
Aluminium tabled instead of the wooden ones for profiling fence		O	O	O
Interchangeable spindle		O	O	O
Spindle for router bits		O	O	O
"LL" version with 2 cast-iron profiling extensions		O	O	O
"TL" version for tenoning and profiling		O	-	-
Tenoning table and tenoning hood		-	O	-
Carriage on the fixed table for small tenoning operations		O	O	O



# PROMPT AND EXPERT TECHNICAL SUPPORT THROUGH A NETWORK OF 1000 TECHNICIANS AND AN INVENTORY OF 36,000 SPARE PARTS.

HIGHLY SPECIALISED TECHNICIANS, EFFICIENT  
MANAGEMENT AND 6 SPARE PARTS BRANCHES  
AROUND THE WORLD GUARANTEE A CLOSE,  
SAFE AND EFFECTIVE TECHNICAL SUPPORT.

## SERVICE

SCM provides a service that goes beyond the purchase, to guarantee the long term performance of your technological production system and peace of mind for your business.

### A COMPLETE RANGE OF AFTER-SALES SERVICES

- installation and start-up of machines, cells, lines and systems
- tailored training programs
- telephone support to reduce times and costs when machines are not working
- preventive maintenance programs to guarantee long term performance
- complete renovation of machines and plants to renew the added value of the investments
- custom upgrading to update machines and plants and meet new production requirements

 **scm**service

## SPARE PARTS

SCM Group can count on 140 spare parts professionals worldwide to meet any request with real time shipments.



### 36,000 SPARE PARTS

Our spare parts inventory, with a value of 12 million euros, covers every single machine



### SPARE PARTS GUARANTEED

We guarantee also hard to find parts, with 3,5 million euros invested in "critical" spare parts.



### IMMEDIATE AVAILABILITY

Over 90% of orders received are carried out the same day thanks to the huge inventory available.



### 6 BRANCHES AROUND THE WORLD

The spare parts service can count on worldwide support (Rimini, Singapore, Shenzhen, Moscow, Atlanta, São Bento do Sul)



### 500 SHIPMENTS A DAY

 **scm**spareparts



# THE STRONGEST WOOD TECHNOLOGIES ARE IN OUR DNA

## SCM. A HERITAGE OF SKILLS IN A UNIQUE BRAND

Over 65 years of success gives SCM the centre stage in woodworking technology. This heritage results from bringing together the best know-how in machining and systems for wood-based manufacturing. SCM is present all over the world, brought to you by the widest distribution network in the industry.

**65** years history

**3** main production sites in Italy

**300.000** square metres of production space

**20.000** machines manufactured per year

**90%** export

**20** foreign branches

**400** agents and dealers

**500** support technicians

**500** registered patents

In **SCM's DNA** also **strength and solidity of a great Group**. The SCM Group is a world leader, manufacturing industrial equipment and components for machining the widest range of materials.

## SCM GROUP, A HIGHLY SKILLED TEAM EXPERT IN INDUSTRIAL MACHINES AND COMPONENTS

### INDUSTRIAL MACHINERY

Stand-alone machines, integrated systems and services dedicated to processing a wide range of materials.



TECHNOLOGIES FOR PROCESSING  
COMPOSITE MATERIALS, ALUMINIUM,  
PLASTIC, GLASS, STONE, METAL

### INDUSTRIAL COMPONENTS

Technological components for the Group's machines and systems, for those of third-parties and the machinery industry.



SPINDLES AND TECHNOLOGICAL  
COMPONENTS



ELECTRIC PANELS



METALWORK



CAST IRON